




Direct draw flow meter installation

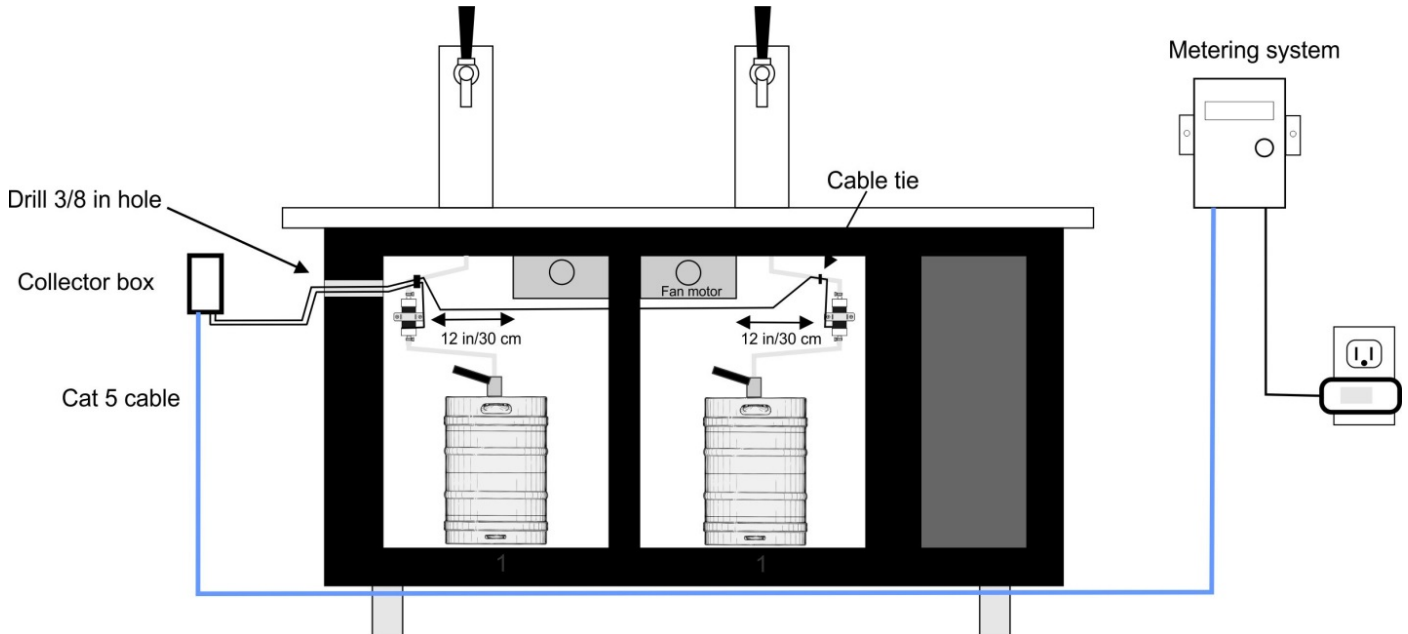

Instructions

1. Flow meters must be kept 30 cm (12 in) from the fan motor.
2. The flow meters should be secured to the cooler wall using the grey plastic bracket provided.
3. A tubing extension kit is provided with each flow meter to extend the tubing should it be necessary.
4. Secure each flow meter cable to the tubing on top of the flow meter with a cable tie.
5. Drill a hole (1/4 or 3/8) to pull the flow meter cables out of the cooler.
6. Secure all flow meter cables using cable ties to keep them out of the way when changing kegs.
7. Follow the metering system instructions to connect the flow meters and metering system.